



MS International, Inc.
Premium Surfaces Since 1975


PALMETTO PORCELAIN COLLECTION

www.msistone.com

Colors



Bianco 6"x36"

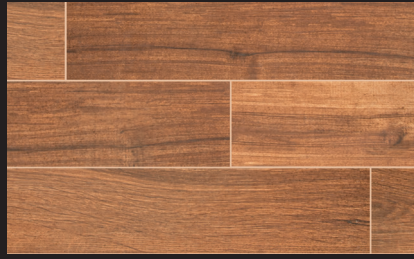

Chestnut 6"x36"



Cognac 6"x36"



Fog 6"x36"



Smoke 6"x36"



Walnut 6"x36"

Size	Thickness	BIANCO	CHESTNUT	COGNAC	FOG	SMOKE	WALNUT
6x36 Matte	3/9"	NPALBIA6X36	NPALCHE6X36	NPALCOG6X36	NPALFOG6X36	NPALSMO6X36	NPALWAL6X36

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Freeze/Thaw	Breaking Strength	Water Absorption	Hardness	Chemical Resistance
RESIDENTIAL	●	●	●	IV	V3	DCOF - >0.42 Wet	Resistant	>275 lbs	<0.5%	7	Resistant
LIGHT COMMERCIAL	●	●	●								
HEAVY COMMERCIAL		●	●								

Add warmth and character, patina and beauty with Palmetto. Fashioned from the latest in high definition ink jet technology, this gorgeous series captures an intricately natural wood look in dependable porcelain. Palmetto is inspired by the rich colors of authentic wood floors and modernized with the most current color glazes. Palmetto is sure to complement any interior space from a modern condo to a traditional villa.

Technical Information

Primary Colors: Brown, Gray
 Material Type: Porcelain
 Country of Origin: Italy
 Finish: Matte

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Disclaimer:

Variation in shade is an inherent attribute of porcelain tile. To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns. *No claims accepted after tile installation.

Features At A Glance

- Luxurious porcelain (Matte) tiles with authentic marble looks and colorations
- Six great colors in a wide variety of sizes and trims
- High Definition Ink Jet Technology

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

